


Cent 3 Enforcer Post should only be 2' Longer than Panel Height

① See Post Setting Chart  
± 1/2" O.C.

**Post Selection Box**

|                         |
|-------------------------|
| 2-1/2" ∅ x 14 Ga. Post  |
| 2-1/2" ∅ x 12 Ga. Post  |
| 3" ∅ x 12 Ga. Post      |
| 4" ∅ x 11 Ga. Post      |
| 6" ∅ x 3/16" Wall. Post |

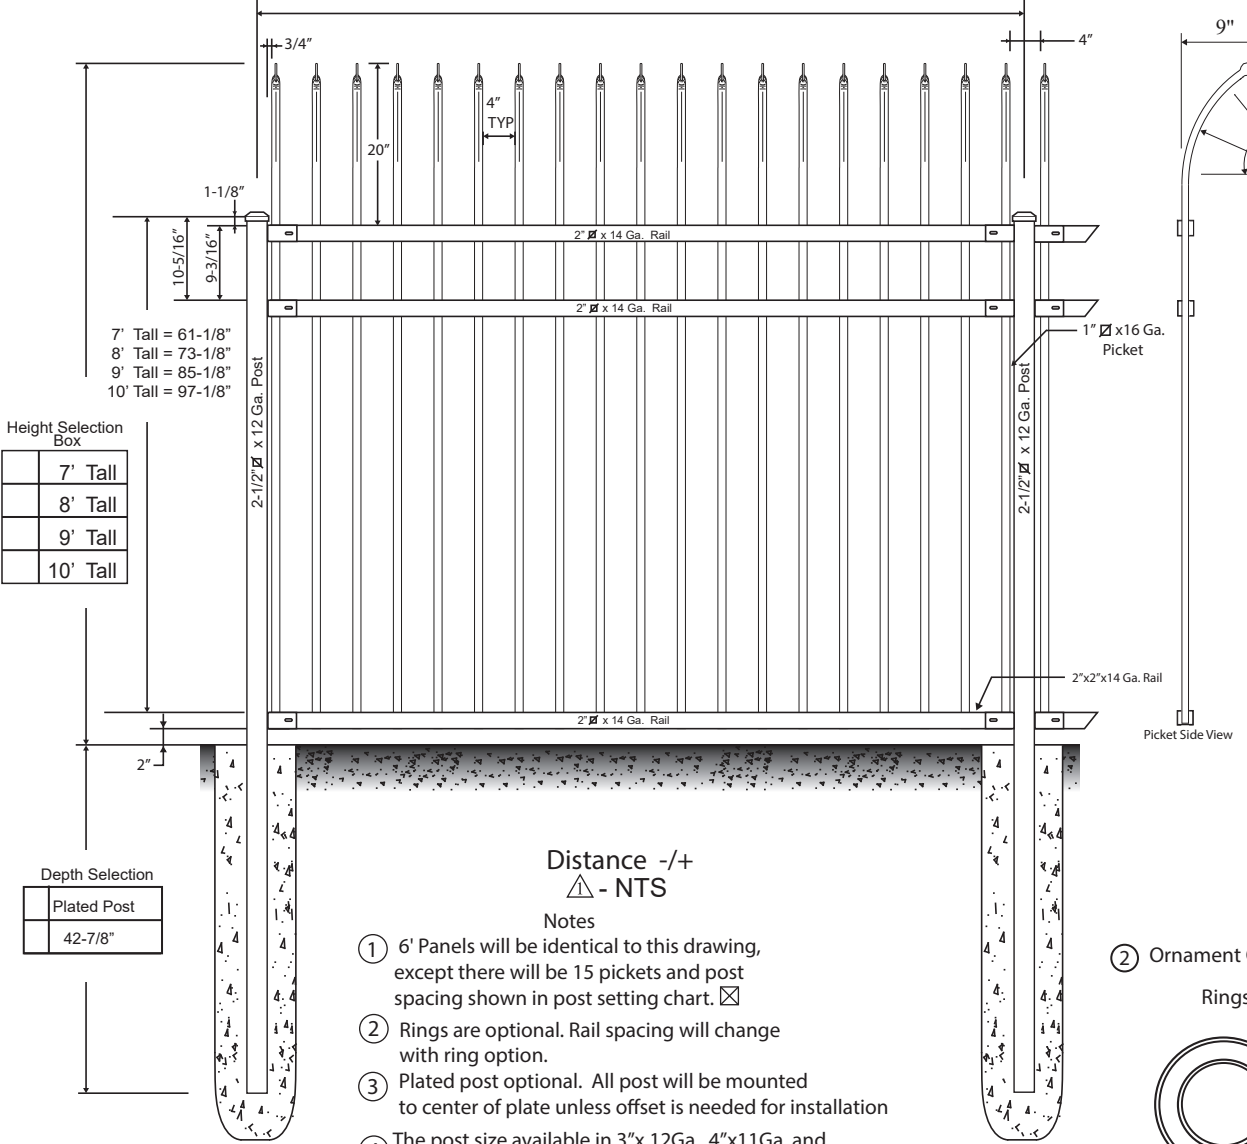

**Height Selection Box**

|          |
|----------|
| 7' Tall  |
| 8' Tall  |
| 9' Tall  |
| 10' Tall |

**Depth Selection**



|             |
|-------------|
| Plated Post |
| 42-7/8"     |

7' Tall = 61-1/8"  
8' Tall = 73-1/8"  
9' Tall = 85-1/8"  
10' Tall = 97-1/8"

**Industrial Swivel Bracket**

**Mounting Bracket Options**

**Flat Mount Industrial Bracket**

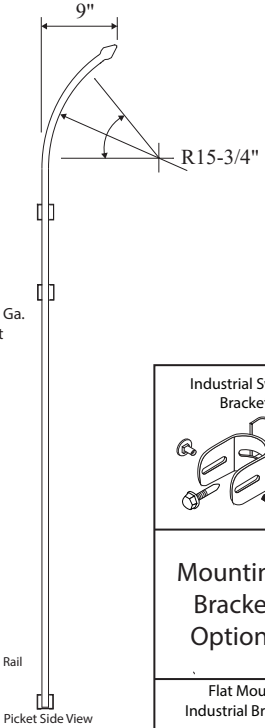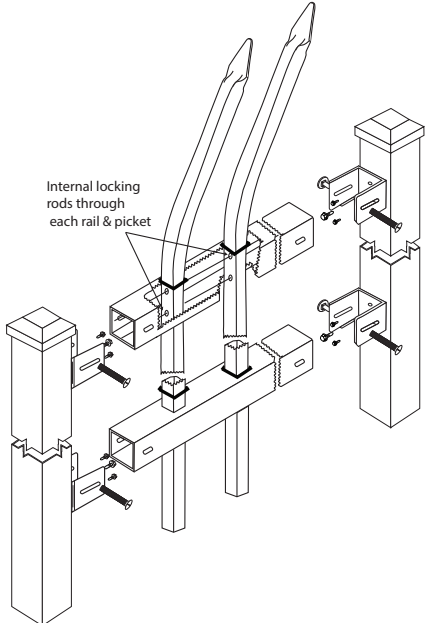


Distance +/-  
△ - NTS

**Notes**

- ① 6' Panels will be identical to this drawing, except there will be 15 pickets and post spacing shown in post setting chart. ☒
- ② Rings are optional. Rail spacing will change with ring option.
- ③ Plated post optional. All post will be mounted to center of plate unless offset is needed for installation
- ④ The post size available in 3"x 12Ga., 4"x11Ga. and 6"x3/16" wall thickness.


② Ornament Options



**Plate Selection for Plated Post**

| Size  | Thickness |
|-------|-----------|
| 4x4   |           |
| 6x6   |           |
| 8x8   |           |
| 12x12 |           |

③

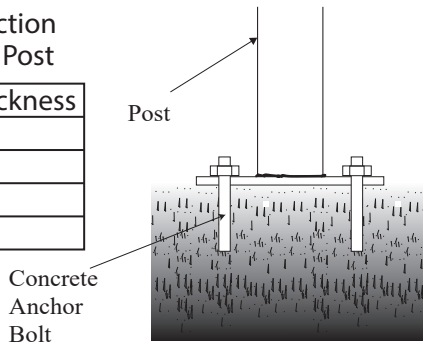

☒ **Post Setting Chart**

| POST SIZE                 | 2-1/2" POSTS |         | 3" POSTS |         | 4" POSTS |         | 6" POSTS |         |
|---------------------------|--------------|---------|----------|---------|----------|---------|----------|---------|
| PANEL WIDTH               | 6'           | 8'      | 6'       | 8'      | 6'       | 8'      | 6'       | 8'      |
| POST SETTINGS ± 1/2" O.C. | 74-3/4"      | 94-5/8" | 75-1/4"  | 95-1/8" | 76-1/4"  | 96-1/8" | 78-1/4"  | 98-1/8" |



Project: SPS Centurion 3 Panel : Enforcer 3-Rail

Approved By: Robert Curry

Revision NO. \_\_\_\_\_ Effective Date \_\_\_\_\_

Drawing NO. C3-P-ENF-3R-FB